


ELECTRONIC BALLAST - T8 Series

Standard Electronic

P Family

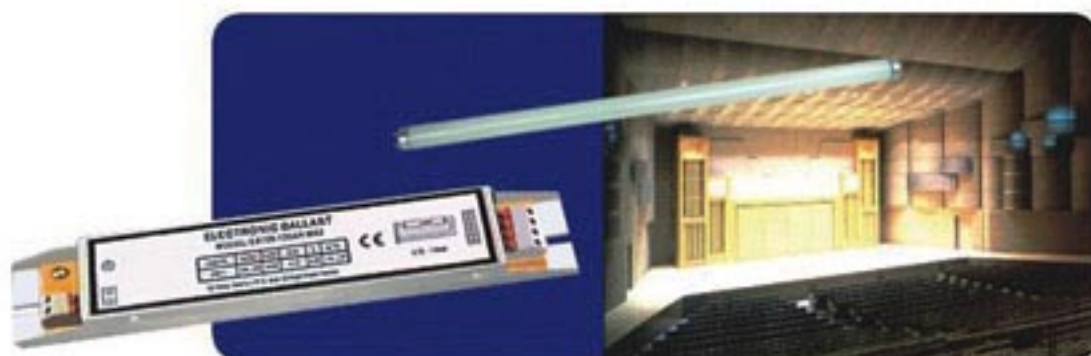



Operation, 230V +/- 10% , Frequency 50-60Hz

MODEL	FT-P 361-M1-T8	FT-P 326-M1-T8	FT-P182-M1-T8
Lamp Number	1	2	2
Lamp Type	T8	T8	T8
Lamp Watts	36	36	18
Line Current@230V (amps)	0.16	0.32	0.16
Input watts(ANSI)	36	72	36
Power Factor	>99%	>99%	>99%
THD Rating	<12%	<12%	<12%
EOL	Yes	Yes	Yes

EOL=end of lamp life


※ Specifications are subject to change without notice

Wiring diagrams

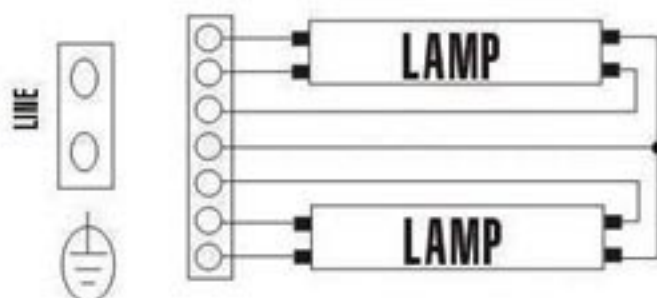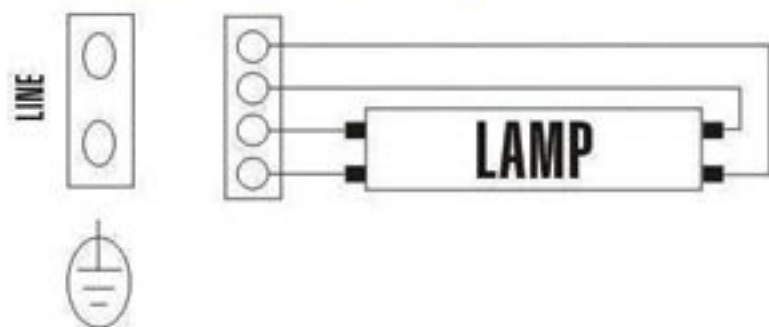

Ballast dimensions

Unit:mm

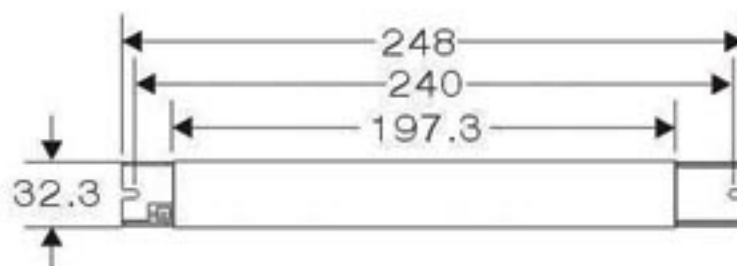

خبراء ترشيد الطاقة

Electronic Ballast P Series الكوابح الالكترونية فيوتك من الفئة P



تتميز الكوابح الالكترونية فيوتك من هذه الفئة بخاصية الجمع بين المواصفات الفنية العالية والسعر الاقتصادي الامر الذي يجعلها تحقق المعادلة الصعبة ويجعلها الاختيار الافضل بين جميع فئات الكوابح الالكترونية على المستوى العالمى هذا بالاضافة الى تمتعها بخاصية دوائر الحماية عند انتهاء عمر اللمبات

FUTEK P series electronic ballast are good choice for industrial and commercial use application , they are equipped with active filter that reduces harmonics to $< 10\%$ while efficiency is close to 99% . the internal power loss is $< 3W /Lamp$.

The professional construction design in metal case and professional connector and ECONOMIC cost will make FUTEK P series Electronic Ballasts best choice world wide

Model	FT-P362M1-T8	FT-P361-M1T8	FT-P182M1-T8
Lamp Type	T8	T8	T8
Lamp Quantity	2	1	2
Lamp Power(W)	36	36	18
Volt	220	220	220
Amp.	0.32	0.16	0.16
Watt	68	34	34
CF	< 1.6	< 1.6	< 1.6
PF	> 99	> 99	> 99
THDi	< 12	< 12	< 12
EOL	Yes	Yes	Yes
Protection	Yes	Yes	Yes
Active Earth	Yes	Yes	Yes
Surge Protection	Yes	Yes	Yes

EOL = End Of Lamp